



不导电



不担心生锈




重量轻



无磁性




牢固固定

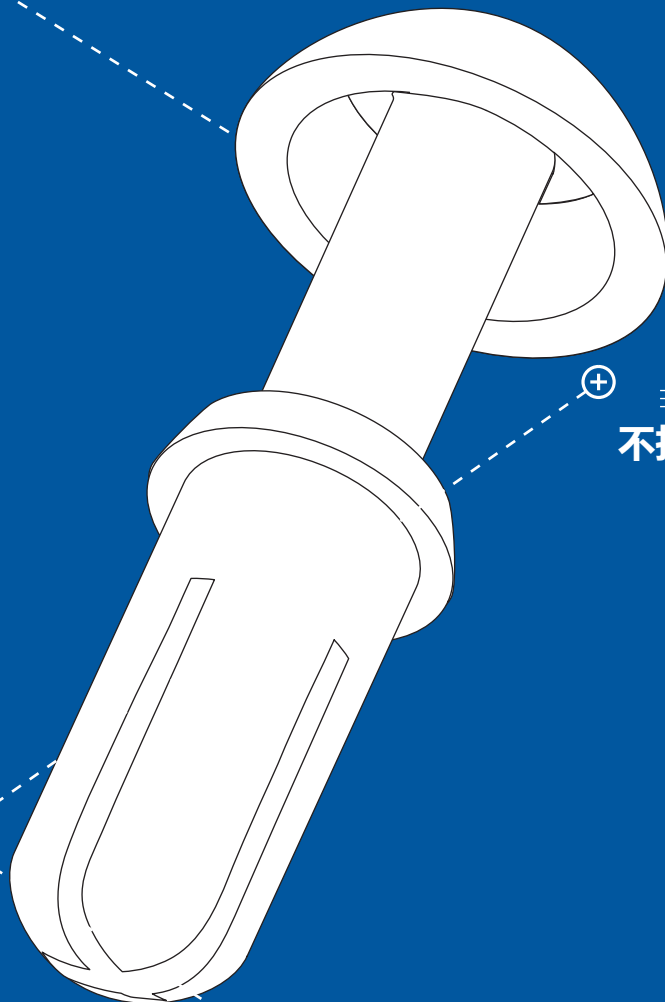

SR型推入式铆钉/子母扣



应用范例一(汽车车灯)

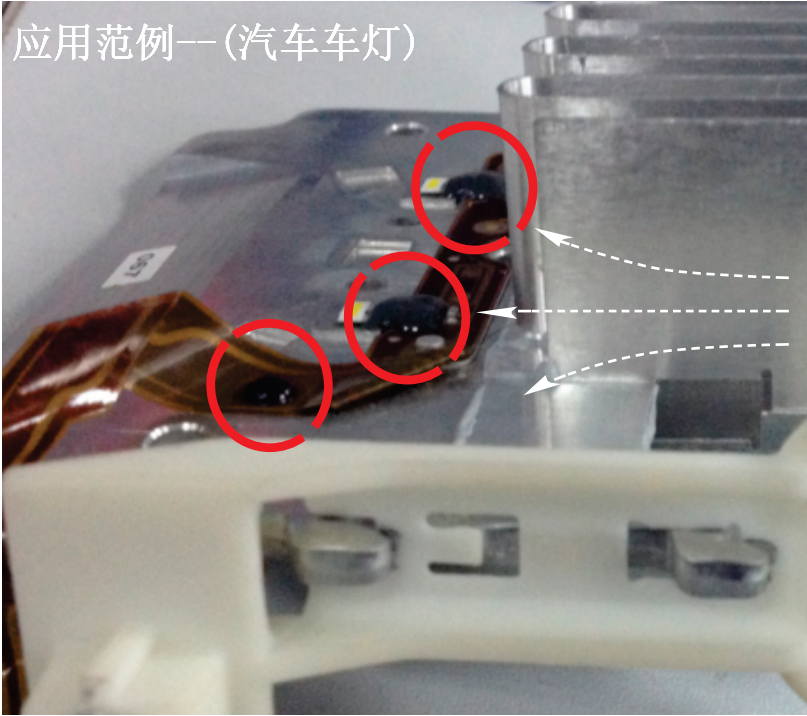


-  连接固定FPC和铝板
-  绝缘
不导电
-  按压即可
效率提升
-  耐高温
最高达
140°C
-  锁定牢固
-  重量轻
-  阻燃级别
UL94V0/V2

SR型推入式铆钉/子母扣

压入即可安装到位。高效，可靠，绝缘，无磁
广泛应用于 LED,汽车，电子，通讯，医疗等行业



底座形状渐变简图

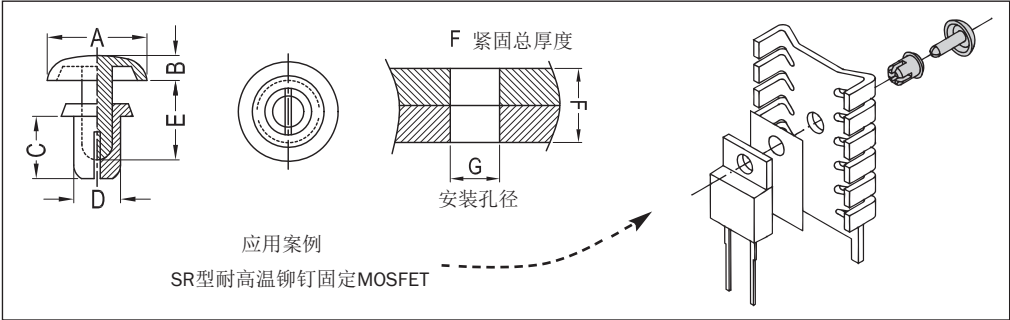


黑色	白色	耐高温	阻燃V0		A	B	C	D	E	F	G
20000	20900	20003	20001	SR-2024B	4.2	1.2	2.4	2.0	2.8	0.6-1.2	2.1-2.2
20004	20002	20007	20005	SR-2032B	4.2	1.2	3.2	2.0	3.8	1.3-2.0	2.1-2.2
20008	20006	20011	20009	SR-2040B	4.2	1.2	4.0	2.0	5.5	2.1-2.8	2.1-2.2
20012	20010	20015	20013	SR-2048B	4.2	1.2	4.8	2.0	5.5	2.9-3.6	2.1-2.2
20016	20014	20019	20017	SR-2056B	4.2	1.2	5.6	2.0	7.1	3.7-4.4	2.1-2.2
20020	20018	20023	20021	SR-2064B	4.2	1.2	6.4	2.0	7.1	4.4-5.0	2.1-2.2
20024	20022	20027	20025	SR-2632B	5.0	1.4	3.2	2.6	4.5	1.0-2.0	2.6-2.7
20032	20026	20035	20033	SR-2642B	5.0	1.4	4.2	2.6	4.5	2.0-3.0	2.6-2.7
20037	20034	20040	20038	SR-2648B	5.0	1.4	4.8	2.6	6.1	2.7-3.6	2.6-2.7
20041	20039	20044	20042	SR-2655B	5.0	1.4	5.6	2.6	6.1	3.4-4.3	2.6-2.7
20045	20043	20048	20046	SR-2664B	5.0	1.4	6.4	2.6	7.8	4.3-5.2	2.6-2.7
20049	20047	20052	20050	SR-2672B	5.0	1.4	7.2	2.6	7.8	5.1-6.0	2.6-2.7
20053	20051	20056	20054	SR-3035B	6.4	1.6	3.5	3.0	5.1	1.0-2.0	3.1-3.2
20058	20055	20061	20059	SR-3045B	6.4	1.6	4.5	3.0	6.1	2.0-3.0	3.1-3.2
20916	20060		20917	GR3050B	6.4	1.6	5.0	3.0	6.1	2.5-3.5	3.1-3.2
20067	20915	20070	20068	SR-3055B	6.4	1.6	5.5	3.0	6.1	3.0-4.0	3.1-3.2
20071	20069	20074	20072	SR-3065B	6.4	1.6	6.5	3.0	7.1	4.0-5.0	3.1-3.2
20079	20073	20082	20080	SR-3075B	6.4	1.6	7.5	3.0	9.0	5.0-6.0	3.1-3.2
20092	20094	20095	20093	SR-3080B	6.4	1.6	8.0	3.0	9.0	5.5-6.5	3.1-3.2
20100	20102	20103	20101	SR-3090B	6.4	1.6	9.0	3.0	11.0	6.5-7.5	3.1-3.2
20104	20106	20107	20105	SR-3100B	6.4	1.6	10.0	3.0	11.0	7.5-8.5	3.1-3.2
20108	20726		20748	SR-3145B	6.4	1.6	14.5	3.0	15.5	11.5-13.0	3.1-3.2
20109	20111	20112	20110	SR-3230B	6.4	1.6	23.0	3.0	24.0	20.5-21.5	3.1-3.2



SR型推入式铆钉/子母扣

压入即可安装到位。高效，可靠，绝缘，无磁
广泛应用于 LED,汽车，电子，通讯，医疗等行业

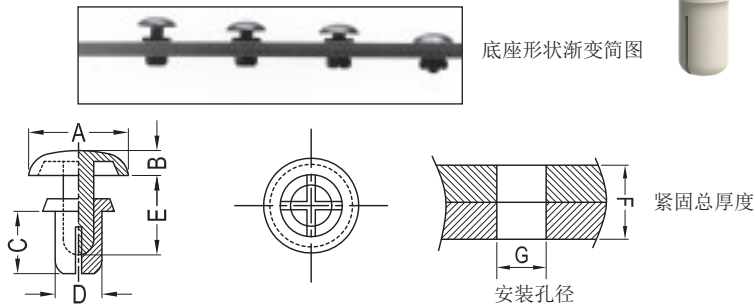

黑色	白色	耐高温	阻燃V0		A	B	C	D	E	F	G
20113	20115	20116	20114	SR-3535B	6.4	1.6	3.5	3.5	5.1	1.2-2.1	3.6-3.7
20117	20119	20120	20118	SR-3545B	6.4	1.6	4.5	3.5	6.1	2.1-3.0	3.6-3.7
20122	20124	20125	20123	SR-3550B	6.4	1.6	5.0	3.5	6.1	2.7-3.6	3.6-3.7
20128	20130	20131	20129	SR-3555B	6.4	1.6	5.5	3.5	7.1	3.0-4.0	3.6-3.7
20133	20135	20136	20134	SR-3560B	6.4	1.6	6.0	3.5	7.1	3.7-4.6	3.6-3.7
20137	20139	20140	20138	SR-3570B	6.4	1.6	7.0	3.5	9.0	4.5-5.5	3.6-3.7
20145	20147	20148	20146	SR-3580B	6.4	1.6	8.0	3.5	9.0	5.5-6.5	3.6-3.7
20793	20918		20919	SR4040B	8.0	1.8	4.0	4.0	5.0	1.7-2.5	4.1-4.2
20149	20151	20152	20150	SR-4050B	8.0	1.8	5.0	4.0	7.1	2.5-3.5	4.1-4.2
20920	20914		20921	SR-4055B	8.0	1.8	5.5	4.0	7.1	3.0-4.0	4.1-4.2
20162	20164	20165	20163	SR-4060B	8.0	1.8	6.0	4.0	7.1	3.5-4.5	4.1-4.2
20172	20174	20175	20173	SR-4070B	8.0	1.8	7.0	4.0	9.0	4.5-5.5	4.1-4.2
20179	20181	20182	20180	SR-4080B	8.0	1.8	8.0	4.0	9.0	5.5-6.5	4.1-4.2
20183	20185	20186	20184	SR-4090B	8.0	1.8	9.0	4.0	11.0	6.5-7.5	4.1-4.2
20190	20192	20193	20191	SR-4100B	8.0	1.8	10.0	4.0	11.0	7.5-8.5	4.1-4.2
20197	20199	20200	20198	SR-4120B	8.0	1.8	12.0	4.0	14.0	9.0-10.5	4.1-4.2
20201	20743		20749	SR-4155B	8.0	1.8	15.5	4.0	16.6	12.5-14.0	4.1-4.2
20202	20204	20205	20203	SR-5045B	9.0	2.2	4.5	5.0	6.5	1.5-2.5	5.1-5.2
20206	20208	20209	20207	SR-5055B	9.0	2.2	5.5	5.0	6.5	2.5-3.5	5.1-5.2
20210	20212	20213	20211	SR-5065B	9.0	2.2	6.5	5.0	8.5	3.5-4.5	5.1-5.2
20221	20223	20224	20222	SR-5075B	9.0	2.2	7.5	5.0	8.5	4.5-5.5	5.1-5.2
20231	20233	20234	20232	SR-5085B	9.0	2.2	8.5	5.0	10.5	5.5-6.5	5.1-5.2
20237	20239	20240	20238	SR-5095B	9.0	2.2	9.5	5.0	10.5	6.5-7.5	5.1-5.2
20241	20243	20244	20242	SR-5105B	9.0	2.2	10.5	5.0	12.0	7.5-8.5	5.1-5.2
20245	20247	20248	20246	SR-5865B	12.0	2.7	6.3	5.8	9.0	3.0-4.0	5.9-6.0
20249	20251		20250	SR-6060B	12.0	2.5	6.0	6.0	9.0	2.5-4.0	6.1-6.2
20253	20255	20256	20254	SR-6080B	12.0	3.0	8.0	6.0	10.0	3.5-5.5	6.1-6.2
21091	21092	21137	21093	SR-6026B	12.0	3.0	26.0	6.0	28.0	21.5-23.5	6.1-6.2
21097	21098	21138	21099	SR-6028B	12.0	3.0	28.5	6.0	30.5	23.5-25.5	6.1-6.2

