




NOTES


- 1.Material Steel,shiny nickle plated
- 2.Refer to part# table for our standard torque
- 3.Other torque parameter is defined by customer
- - No need tooling cost
- 4.Torque Hinge open&close life cycle 25,000 at least
- 5.360° rotation
- 6.Enable users to easily position doors/
panels/display screens and other mounted
components and hold them securely at any
desired angle
- 7.Ergonomic design with smooth&consistent motion
- 8.For better performance,we recommend
symmetric mount

Reference	D	W	H	E	C	T	Std. torque
1ZFH01-02	5.5	19.1	24.2	5.2	2.8	1.0	0.1-0.3N.m
1ZFH01-04	5.5	19.1	24.2	5.2	2.8	1.0	0.3-0.5N.m
1ZFH01-06	5.5	19.1	24.2	5.2	2.8	1.0	0.5-0.7N.m
1ZFH02-08	7.9	25.4	30.9	6.3	3.3	1.2	0.6-0.9N.m
1ZFH02-10	7.9	25.4	30.9	6.3	3.3	1.2	0.8-1.2N.m
1ZFH02-12	7.9	25.4	30.9	6.3	3.3	1.2	1.0-1.4N.m

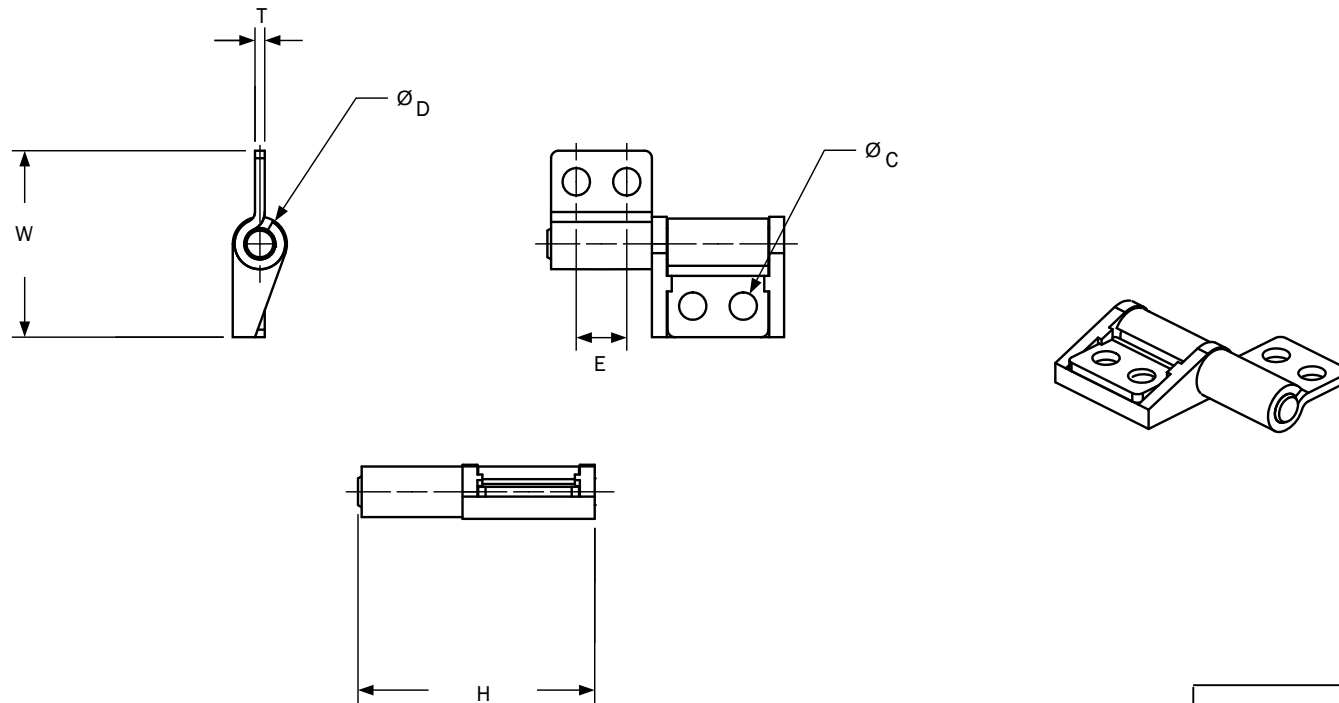

UNLESS OTHERWISE
SPECIFIED
GENERAL TOLERANCE
DIN ISO 2768 mk

THIRD ANGLE PROJECTION



ANGULAR TOLERANCE ±0.5 DEGREES
UNSPECIFIED RADII 0.25mm
DRAFT ANGLE 0.5 DEGREES

DO NOT SCALE

ALL DIMENSIONS IN mm

DATE: 19 May 2016

MATERIAL: SEE TABLE

ITEM NUMBER: SEE TABLE

TITLE:
COMPACT SIZE TORQUE HINGE
Z TYPE

DWG.No.
05001609

REV,
1