


NOTES


- 1.Material Steel,shiny nickle plated
- 2.Refer to part# table for our standard torque
- 3.Other torque parameter is defined by customer
- - No need tooling cost
- 4.Torque Hinge open&close life cycle 30,000 at least
- 5.360° rotation
- 6.Enable users to easily position doors/
panels/display screens and other mounted
components and hold them securely at any
desired angle
- 7.Ergonomic design with smooth&consistent motion
- 8.For better performance,we recommend
symmetric mount

Reference	D	W	H	E	C	T	Std. torque	Fig.
FFH01-02	5.5	12.3	27.7	5.2	2.8	2.8	0.1-0.3N.m	F1
FFH01-03	5.5	12.3	27.7	5.2	2.8	2.8	0.3-0.5N.m	F1
FFH01-05	5.5	12.3	27.7	5.2	2.8	2.8	0.5-0.7N.m	F1
FFH02-07	7.9	16.7	34.9	6.3	3.3	4.0	0.6-0.9N.m	F1
FFH02-10	7.9	16.7	34.9	6.3	3.3	4.0	0.8-1.1N.m	F1
FFH02-12	7.9	16.7	34.9	6.3	3.3	4.0	1.0-1.4N.m	F1
FFH03-20	10.3	21.0	63.5	7.9	3.8	5.2	1.6-2.3N.m	F2
FFH03-25	10.3	21.0	63.5	7.9	3.8	5.2	2.0-2.9N.m	F2
FFH03-30	10.3	21.0	63.5	7.9	3.8	5.2	2.6-3.5N.m	F2
FFH04-30	13.9	25.2	82.5	12.7	4.5	6.9	2.5-3.4N.m	F2
FFH04-33	13.9	25.2	82.5	12.7	4.5	6.9	2.8-3.8N.m	F2
FFH04-40	13.9	25.2	82.5	12.7	4.5	6.9	3.4-4.5N.m	F2

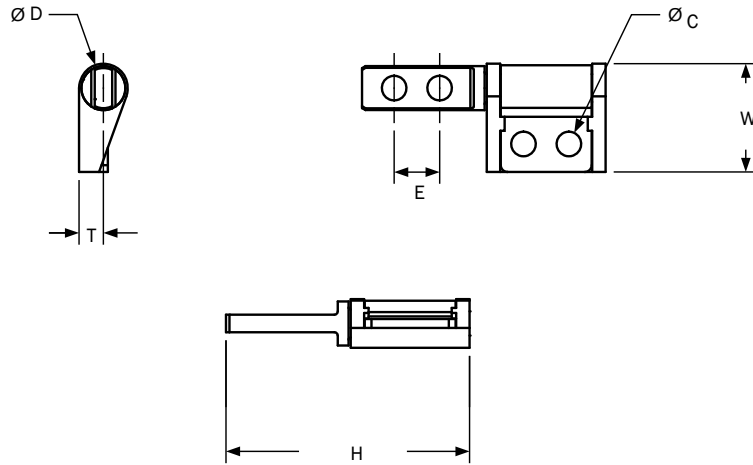

UNLESS OTHERWISE
SPECIFIED
GENERAL TOLERANCE
DIN ISO 2768 mk

THIRD ANGLE PROJECTION



ANGULAR TOLERANCE ±0.5 DEGREES
UNSPECIFIED RADII 0.25mm
DRAFT ANGLE 0.5 DEGREES

DO NOT SCALE

ALL DIMENSIONS IN mm

DATE: 19 May 2016

MATERIAL: SEE TABLE

ITEM NUMBER: SEE TABLE

TITLE:
COMPACT SIZE TORQUE HINGE
FLAG TYPE

DWG.No.

05001608

REV,

1