




NOTES


- 1.Material Steel,shiny nickle plated
- 2.Refer to part# table for our standard torque
- 3.Other torque parameter is defined by customer
- - No need tooling cost
- 4.Torque Hinge open&close life cycle 30,000 at least
- 5.360° rotation
- 6.Enable users to easily position doors/
panels/display screens and other mounted
components and hold them securely at any
desired angle
- 7.Ergonomic design with smooth&consistent motion
- 8.For better performance,we recommend
symmetric mount

Reference	D	W	H	E	C	T	Std. torque
FFH11-04	5.5	12.1	37.1	5.2	2.8	1.0	0.3-0.5N.m
FFH11-08	5.5	12.1	37.1	5.2	2.8	1.0	0.6-0.9N.m
FFH11-12	5.5	12.1	37.1	5.2	2.8	1.0	0.9-1.4N.m
FFH12-15	7.2	16.3	46.4	6.3	3.3	1.2	1.1-1.8N.m
FFH12-20	7.2	16.3	46.4	6.3	3.3	1.2	1.6-2.3N.m
FFH12-24	7.2	16.3	46.4	6.3	3.3	1.2	2.0-2.7N.m

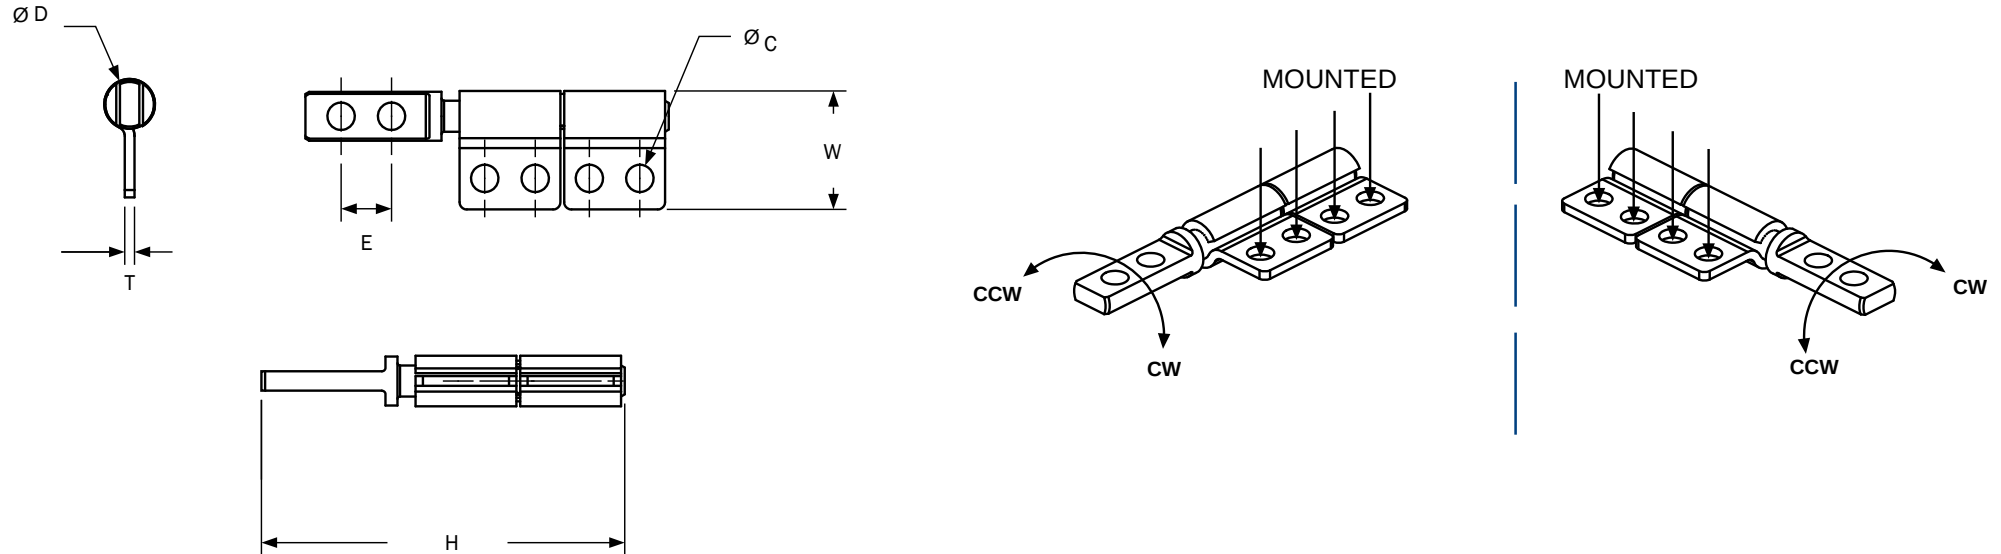

UNLESS OTHERWISE
SPECIFIED
GENERAL TOLERANCE
DIN ISO 2768 mk

THIRD ANGLE PROJECTION



ANGULAR TOLERANCE ±0.5 DEGREES
UNSPECIFIED RADII 0.25mm
DRAFT ANGLE 0.5 DEGREES

DO NOT SCALE

ALL DIMENSIONS IN mm

DATE: 19 May 2016

MATERIAL: SEE TABLE

ITEM NUMBER: SEE TABLE

TITLE:
COMPACT SIZE TORQUE HINGE
FLAG TYPE

DWG.No.

05001608-2

REV,

1