
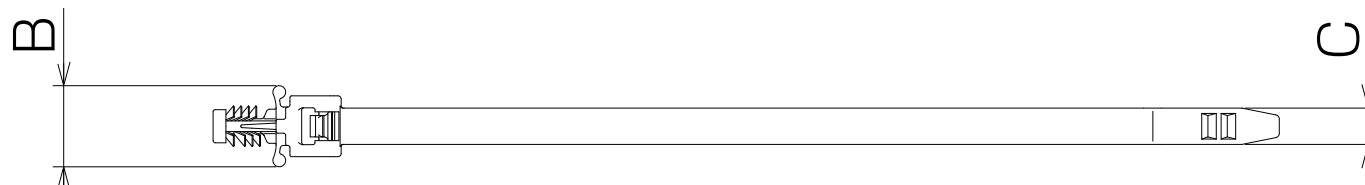


REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/16	SFH

- Plug-in mounting in screw hole is available without tool.
- Screw hole of M4 and M5 are available.
- Operating temperature range: -40℃~125℃
- Bunding cable diameter:see table below





Pull out force of the fir tree locking head > 40N

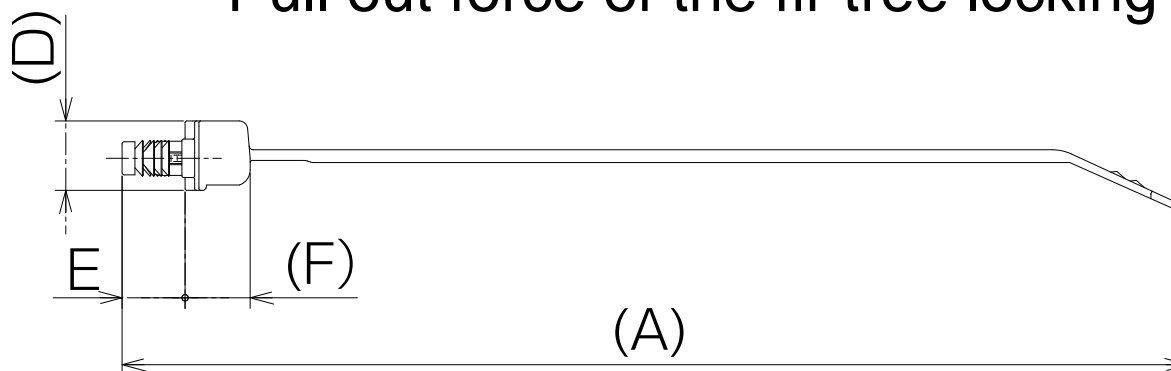

Part No.	(A)	B	C	(D)	E	(F)	Mounting hole size	Bundle diameter	Std. Package
FTCT-M4	99.9	7.6	3.4	6.5	5.9	6.1	M4 screw hole $\phi 3.7-4.0$	$\phi 1 \sim 20$	1000
FTCT-M5	130.7	8.5	3.6	6.5	6.7	6.1	M5 screw hole $\phi 4.8-5.0$	$\phi 1 \sim 24$	1000
blank									

(Unit : mm)

 <i>industrial fastening components</i>		ALL DIMENSIONS IN mm GENERAL TOLERANCES $\pm 0.25$ UNLESS OTHERWISE STATED 1 DECIMAL PLACE $\pm 0.25$ 2 DECIMAL PLACES $\pm 0.10$ ANGULAR $\pm 1^\circ$		THIRD ANGLE 	
MATERIAL: NYLON 66				COLOUR: BLACK	
DESCRIPTION: FIR TREE CABLE STRAP				PART No: SEE TABLE	
DRG No: 012-006		PROJECT NUMBER: EU12-0020		Mass:(g)	SHEET SIZE A4
DRN SFH	DATE 03/02/12	CHKD TC	DATE 03/02/12	SCALE NTS	SHEET No. 1 OF 1