
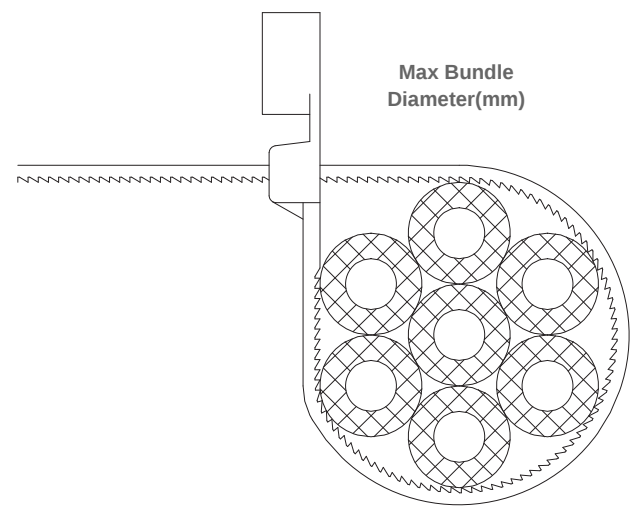


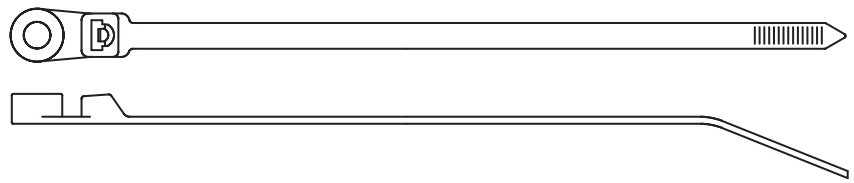

Item No	Length		Width(m m)	screw hole	Max Bundle Diameter(mm)	Tensile Strength		material
	Inch	mm				LBS	KGS	
101050	4.3	110	2.5	M3	22	17.8	8.1	UL94V2尼龙,本色
101051	5.9	150	3.6	M4	32	40	18.2	UL94V2尼龙,本色
101059	7.8	200	4.3	M4	50	42	19	UL94V2尼龙,本色
101053	7.8	200	4.8	M5	50	48.8	22.2	UL94V2尼龙,本色
10105X	7.8	200	4.8	M6	50	48.8	22.2	UL94V2尼龙,本色
101054	11.8	300	4.8	M5	70	48.8	22.2	UL94V2尼龙,本色
101054M6	11.8	300	4.8	M6	70	48.8	22.2	UL94V2尼龙,本色
101057	15.0	380	7.6	M6	98	120	55	UL94V2尼龙,本色
101050B	4.3	110	2.5	M3	22	17.8	8.1	UL94V2尼龙,黑色
101051B	5.9	150	3.6	M4	32	40	18.2	UL94V2尼龙,黑色
101058B	7.3	185	3.6	M4	32	40	18.2	UL94V2尼龙,黑色
101059B	7.8	200	4.3	M4	50	42	19	UL94V2尼龙,黑色
101053B	7.8	200	4.8	M5	50	48.8	22.2	UL94V2尼龙,黑色
10105XB	7.8	200	4.8	M6	50	48.8	22.2	UL94V2尼龙,黑色
101054B	11.8	300	4.8	M5	70	48.8	22.2	UL94V2尼龙,黑色
101054M6B	11.8	300	4.8	M6	70	48.8	22.2	UL94V2尼龙,黑色
101057B	15.0	380	7.6	M6	98	120	55	UL94V2尼龙,黑色

NOTES

1. MATERIAL PA66
2. FLAMMABILITY UL94 V2
3. WORKING TEMPERATURE MIN -40℃ MAX 85 ℃