


THIS DOCUMENT IS THE PROPERTY OF SINOHUA ENGINEERING SOLUTIONS.THE CONTENTS ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SINOHUA ENGINEERING SOLUTIONS.
NEITHER THIS DOCUMENT NOR ITS CONTENT SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON,COPIED OR PUBLISHED WITHOUT SINOHUA ENGINEERING SOLUTIONS'PRIOR WRITTEN CONSENT.

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/16	SFH

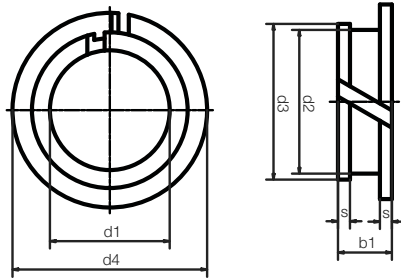

APPLICATION RECOMMENDATION


Part Number	d1	d2	d3	d4	s	b1	ID of Bearing in Housing	Recommended Sheet Metal Thickness
SC-03-02	3	4.2	4.8	6	0.6	3.2	3.025	2.34/1.45
SC-03-03	3	4.2	4.8	6	0.6	4.2	3.025	3.13/2.87
SC-04-02	4	5.2	5.9	7	0.6	3.2	4.025	2.34/1.45
SC-04-03	4	5.2	5.9	7	0.6	4.2	4.025	3.13/2.87
SC-05-02	5	6.2	6.8	8	0.6	3.2	5.025	2.34/1.45
SC-05-03	5	6.2	6.8	8	0.6	4.2	5.025	3.13/2.87
SC-06-02	6	7.2	7.8	11	0.6	3.2	6.025	2.34/1.45
SC-06-03	6	7.2	7.8	11	0.6	4.2	6.025	3.13/2.87
SC-06-04	6	7.2	7.8	11	0.6	5.2	6.025	4.40/4.00
SC-07-03	7	9	9.8	13	0.8	4.6	7.025	3.13/2.87
SC-08-02	8	9.6	10.4	13	0.8	3.6	8.025	2.34/1.45
SC-08-03	8	9.6	10.4	13	0.8	4.6	8.025	3.13/2.87
SC-09-02	9	10.6	11.4	14	0.8	3.6	9.025	2.34/1.45
SC-10-02	10	11.6	12.4	15	0.8	3.6	10.025	2.34/1.45
SC-10-03	10	11.6	12.4	15	0.8	4.6	10.025	3.13/2.87
SC-12-02	12	13.6	14.4	17	0.8	3.6	12.025	2.34/1.45
SC-12-03	12	13.6	14.4	17	0.8	4.6	12.025	3.13/2.87
SC-12-04	12	13.6	14.4	17	0.8	5.6	12.025	4.40/4.00
SC-14-03	14	15.6	16.4	19	0.8	4.6	14.025	3.13/2.87
SC-16-02	16	17.6	18.4	21	0.8	3.6	16.025	2.34/1.45
SC-16-03	16	17.6	18.4	21	0.8	4.6	16.025	3.13/2.87
SC-18-03	18	20	21	23	1.0	5.0	18.025	3.13/2.87
SC-20-03	20	22	23	25	1.0	5.0	20.025	3.13/2.87
SC-25-03	25	27	28	30	1.0	5.0	25.025	3.13/2.87

Part Number	Recommended Housing Bore		Recommended Shaft Size	
	Max.	Min.	Max.	Min.
SC-03-02	4.380	4.200	3.000	2.975
SC-03-03	4.380	4.200	3.000	2.975
SC-04-02	5.380	5.200	4.000	3.975
SC-04-03	5.380	5.200	4.000	3.975
SC-05-02	6.420	6.200	5.000	4.975
SC-05-03	6.420	6.200	5.000	4.975
SC-06-02	7.420	7.200	6.000	5.975
SC-06-03	7.420	7.200	6.000	5.975
SC-06-04	7.420	7.200	6.000	5.975
SC-07-03	9.220	9.000	7.000	6.975
SC-08-02	9.820	9.600	8.000	7.975
SC-08-03	9.820	9.600	8.000	7.975
SC-09-02	10.870	10.600	9.000	8.975
SC-10-02	11.870	11.600	10.000	9.975
SC-10-03	11.870	11.600	10.000	9.975
SC-12-02	13.870	13.600	12.000	11.975
SC-12-03	13.870	13.600	12.000	11.975
SC-12-04	13.870	13.600	12.000	11.975
SC-14-03	15.870	15.600	14.000	13.975
SC-16-02	17.870	17.600	16.000	15.975
SC-16-03	17.870	17.600	16.000	15.975
SC-18-03	20.330	20.000	18.000	17.975
SC-20-03	22.330	22.000	20.000	19.975
SC-25-03	27.330	27.000	25.000	24.975



ALL DIMENSIONS IN mm
GENERAL TOLERANCES ± 0.25
UNLESS OTHERWISE STATED
1 DECIMAL PLACE ± 0.25
2 DECIMAL PLACES ± 0.10
ANGULAR $\pm 1^\circ$

THIRD
ANGLE



DESCRIPTION:

SHAFT
CLIP

MATERIAL:
REINFORCED NYLON

COLOUR:
BLACK

PART No:
SEE TABLE

DRG No:
MCM012563

PROJECT NUMBER:
EU12-0020

Mass:(g)
SHEET SIZE
A4

DRN
SFH

DATE
03/02/12

CHKD
TC

DATE
03/02/12

SCALE
NTS

SHEET No.
1 OF 1