



THIS DOCUMENT IS THE PROPERTY OF SINOHUA ENGINEERING SOLUTIONS.THE CONTENTS ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SINOHUA ENGINEERING SOLUTIONS.
NEITHER THIS DOCUMENT NOR ITS CONTENT SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON,COPIED OR PUBLISHED WITHOUT SINOHUA ENGINEERING SOLUTIONS'PRIOR WRITTEN CONSENT.


REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/16	SFH

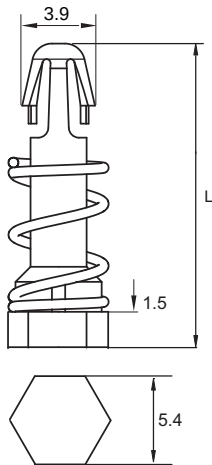

F1

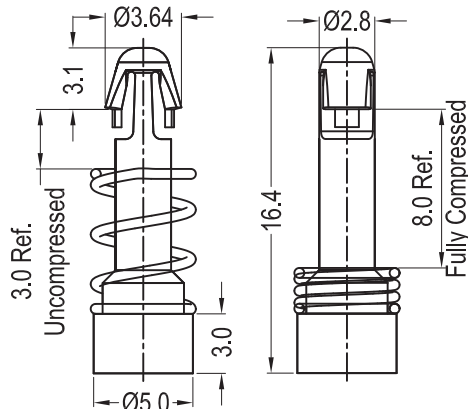

F2

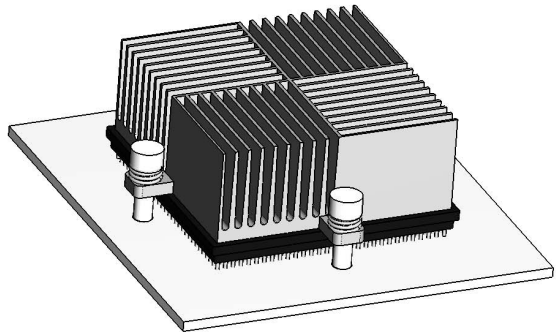

TYPICAL APPLICATION

Heat Sink Hole: Inserts through a (3.18-4.0mm) Hole [0.125"-0.157"]
Chassis Hole: Snap-Lock into a (3.0±0.08mm) Hole [0.118+/-0.003"]

物料编号	安装孔径	D	L	图示
HSR-L01101	φ3.0-3.2	---	11.7	F1
HSR-L01102	φ3.0-3.2	---	13.5	F1
HSR-L01103	φ3.0-3.2	---	13.8	F1
HSR-L01104	φ3.0-3.2	---	14.5	F1
HSR-L01105	φ3.0-3.2	---	18	F1

物料编号	图示
HSR-K76101	F2
Body	Spring
PA66 UL94V2	Steel, Nickel Plated

Body
PA66 UL94V2

Spring
Steel, Nickel Plated