

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/16	SFH

Item No.	Screw Size	Ø A		OD		C		Ø B		Bulk Pack Qty
		in	mm	in	mm	in	mm	in	mm	
ALW002032	#2	0.115	2.9	0.203	5.2	0.032	0.8	0.078	2.0	1000
ALW002062	#2	0.115	2.9	0.203	5.2	0.062	1.6	0.078	2.0	1000
ALW004032	#4	0.156	4.0	0.266	6.8	0.032	0.8	0.102	2.6	1000
ALW004050	#4	0.156	4.0	0.250	6.4	0.050	1.3	0.102	2.6	1000
ALW004062	#4	0.156	4.0	0.266	6.8	0.062	1.6	0.102	2.6	1000
ALW004125	#4	0.156	4.0	0.266	6.8	0.125	3.2	0.102	2.6	1000
ALW006032	#6	0.198	5.0	0.328	8.3	0.032	0.8	0.128	3.3	1000
ALW006062	#6	0.198	5.0	0.328	8.3	0.062	1.6	0.128	3.3	1000
ALW007062		0.375	9.5	0.750	19.1	0.062	1.6	0.215	5.5	500
ALW007062A		0.375	9.5	1.000	25.4	0.062	1.6	0.215	5.5	250
ALW008045	#8	0.218	5.5	0.453	11.5	0.045	1.1	0.135	3.4	1000
ALW008032	#8	0.235	6.0	0.391	9.9	0.032	0.8	0.152	3.9	1000
ALW008032A	#8	0.235	6.0	0.390	9.9	0.032	0.8	0.135	3.4	1000
ALW008032C	#8	0.235	6.0	0.328	8.3	0.032	0.8	0.152	3.9	1000
ALW008062	#8	0.235	6.0	0.391	9.9	0.062	1.6	0.152	3.9	1000
ALW010059	#10	0.275	7.0	0.787	20.0	0.059	1.5	0.177	4.5	500
ALW010032	#10	0.277	7.0	0.453	11.5	0.032	0.8	0.177	4.5	1000
ALW010055	#10	0.277	7.0	0.400	10.2	0.055	1.4	0.177	4.5	1000
ALW010062	#10	0.277	7.0	0.453	11.5	0.062	1.6	0.177	4.5	1000
ALW010062A	#10	0.277	7.0	0.500	12.7	0.062	1.6	0.177	4.5	1000
ALW010062C	#10	0.277	7.0	0.630	16.0	0.062	1.6	0.177	4.5	1000
ALW250032A	1/4	0.344	8.7	0.500	12.7	0.032	0.8	0.234	5.9	1000
ALW250032	1/4	0.375	9.5	0.594	15.1	0.032	0.8	0.234	5.9	1000
ALW250062	1/4	0.375	9.5	0.594	15.1	0.062	1.6	0.234	5.9	1000
ALW250062C	1/4	0.375	9.5	1.500	38.1	0.062	1.6	0.234	5.9	1000
ALW250062E	1/4	0.375	9.5	0.734	18.7	0.062	1.6	0.234	5.9	1000
ALW250062A	1/4	0.450	11.4	1.500	38.1	0.062	1.6	0.234	5.9	1000
ALW312032	5/16	0.470	11.9	0.734	18.7	0.032	0.8	0.292	7.4	1000
ALW312062	5/16	0.470	11.9	0.734	18.7	0.062	1.6	0.292	7.4	1000
ALW375062A	3/8	0.563	14.3	1.260	32.0	0.062	1.6	0.350	8.9	1000
ALW375032	3/8	0.564	14.3	0.891	22.6	0.032	0.8	0.350	8.9	1000
ALW375062	3/8	0.564	14.3	0.891	22.6	0.062	1.6	0.350	8.9	500
ALW375062C	3/8	0.564	14.3	0.734	18.7	0.062	1.6	0.350	8.9	1000
ALW437032	7/16	0.570	14.5	1.031	26.2	0.032	0.8	0.410	10.4	500
ALW437062	7/16	0.570	14.5	1.031	26.2	0.062	1.6	0.410	10.4	500
ALW500032	1/2	0.690	17.5	1.125	28.6	0.032	0.8	0.468	11.9	500
ALW500062	1/2	0.690	17.5	1.125	28.6	0.062	1.6	0.468	11.9	500
ALW875062	7/8	0.940	23.9	1.344	34.1	0.062	1.6	0.825	21.0	250
ALW999062	1	1.070	27.2	1.385	35.2	0.062	1.6	0.970	24.6	250


Specifications:

- Material: UL94 V-2 Nylon 6/6
- Color: Natural

Features:

- Allows preliminary mounting of the bolt before securing with a nut
- The tapered design retains the screw prior to assembly; it cold forms and fully enters the pitch of the screw to provide sealing

Item No.	Size	ID mm	OD mm	T mm	A Ref mm
16SRRW004209083	#4	3.2	8.2	2.2	0.8
16SRRW006354150	#6	3.9	9.2	2.4	0.9
16SRRW008374163	#8	4.1	9.7	2.6	1.0
16SRRW010421200	#10	5.1	10.7	3.1	1.5
16SRRW025500242	1/4	6.2	12.7	3.5	1.8
16SRRW025500256	1/4	6.5	12.8	3.5	1.8
16SRRW031637318	5/16	8.1	16.3	4.0	1.5
16SRRW037771381	3/8	9.7	19.7	4.5	1.8
16SRRW050100504	1/2	12.8	25.4	5.0	2.0

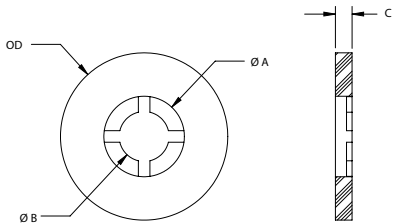



Specifications:

- Material: UL94 V-2 Nylon 6/6
- Color: Natural

Features:

- ID designed to grip the outside of the screw shank
- Washer slides onto the screw easily, but is retained on the screw
- For use in applications requiring pre-assembly of the screw and washer
- Reduces final assembly cost

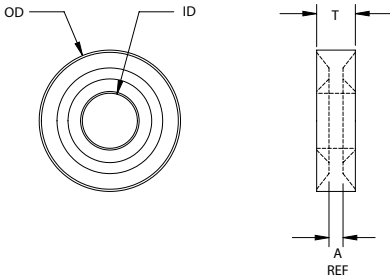

 www.sinohua.cn	ALL DIMENSIONS IN mm GENERAL TOLERANCES ±0.25 UNLESS OTHERWISE STATED 1 DECIMAL PLACE ±0.25 2 DECIMAL PLACES ± 0.10 ANGULAR ±1°	THIRD ANGLE 	DESCRIPTION: ANTI-LOSS WASHER	MATERIAL: SEE TABLE		COLOUR: SEE TABLE		PART No: SEE TABLE	
				DRG No: 543232		PROJECT NUMBER: EU12-9042		Mass:(g)	SHEET SIZE A4
				DRN SFH	DATE 03/02/12	CHKD TC	DATE 03/02/12	SCALE NTS	SHEET No. 1 OF 1