



THIS DOCUMENT IS THE PROPERTY OF SINOHUA ENGINEERING SOLUTIONS.THE CONTENTS ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SINOHUA ENGINEERING SOLUTIONS.
NEITHER THIS DOCUMENT NOR ITS CONTENT SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON,COPIED OR PUBLISHED WITHOUT SINOHUA ENGINEERING SOLUTIONS'PRIOR WRITTEN CONSENT.

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/16	SFH

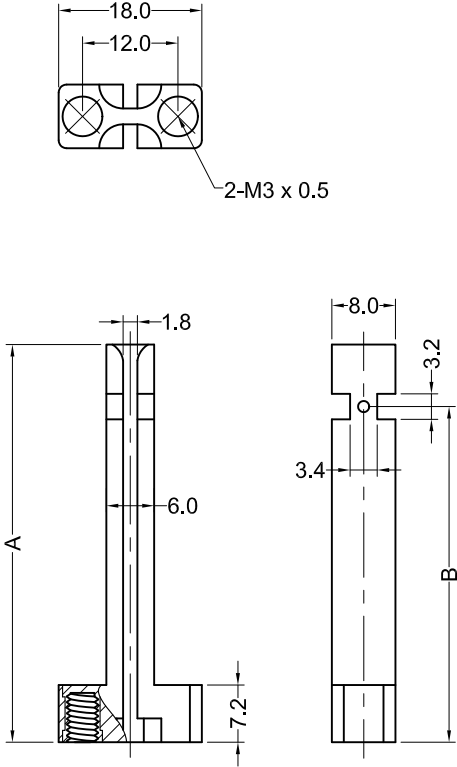


2-M3 x 0.5

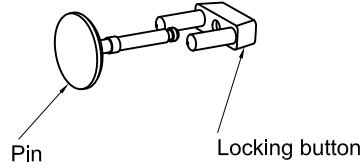

Dim."A"	Dim."B"	Locking pin type P/N	Non locking Pin P/N
39	31.5	GRS6029VR	GRS6029
46.5	42.3	GRS6046VR	GRS6046
50	42	GRS6050VR	GRS6050
65	56.5	GRS6030VR	GRS6030
90	81.5	GRS6031VR	GRS6031
135	126.5	GRS6022VR	GRS6022
160	112.5	GRS6026VR	GRS6026
120.1	112.5	GRS6032VR	GRS6032

COLOUR CODE
GREY SUFFIX CODE-"GY"/BLUE SUFFIX CODE-"BU"

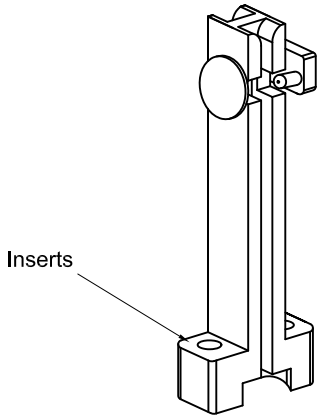

- Notes:
- 1.Body: PA6 glass filled 30%;
 - 2.Locking Button: PA6 glass filled 30%;
 - 3.Inserts: Brass Nickel Plated
 - 4.Pin: Brass Nickel Plated
 - 5.RoHS Compliant