


RAL NUMBER	COLOR	Snap Size ϕ	Seal Type	ϕA	ϕD	B	C	H	SW 1	SW 2	Clamping Range ϕ min-max	Clamping Range (S1) (Outer Seal)	Clamping Range (S1+S2) (Outer Seal+Inner Seal)
7035	L.Grey	16.0	Double	16.2 - 16.4	26.5	9.0	0.5 - 4.0	42.5	22	22	3.0 - 10.0	5.0 - 10.0	3.0 - 5.0
7001	Grey	16.0	Double	16.2 - 16.4	26.5	9.0	0.5 - 4.0	42.5	22	22	3.0 - 10.0	5.0 - 10.0	3.0 - 5.0
9005	Black	16.0	Double	16.2 - 16.4	26.5	9.0	0.5 - 4.0	42.5	22	22	3.0 - 10.0	5.0 - 10.0	3.0 - 5.0
7035	L.Grey	16.0	Single	16.2 - 16.4	26.5	9.0	0.5 - 4.0	42.5	22	22	3.0 - 10.0	5.0 - 10.0	-
7001	Grey	16.0	Single	16.2 - 16.4	26.5	9.0	0.5 - 4.0	42.5	22	22	3.0 - 10.0	5.0 - 10.0	-
9005	Black	16.0	Single	16.2 - 16.4	26.5	9.0	0.5 - 4.0	42.5	22	22	3.0 - 10.0	5.0 - 10.0	-
7035	L.Grey	20.0	Double	20.2 - 20.4	30.3	9.0	0.5 - 4.0	41.5	24	24	5.0 - 12.0	6.0 - 12.0	5.0 - 6.0
7001	Grey	20.0	Double	20.2 - 20.4	30.3	9.0	0.5 - 4.0	41.5	24	24	5.0 - 12.0	6.0 - 12.0	5.0 - 6.0
9005	Black	20.0	Double	20.2 - 20.4	30.3	9.0	0.5 - 4.0	41.5	24	24	5.0 - 12.0	6.0 - 12.0	5.0 - 6.0
7035	L.Grey	20.0	Single	20.2 - 20.4	30.3	9.0	0.5 - 4.0	41.5	24	24	6.0 - 12.0	6.0 - 12.0	-
7001	Grey	20.0	Single	20.2 - 20.4	30.3	9.0	0.5 - 4.0	41.5	24	24	6.0 - 12.0	6.0 - 12.0	-
9005	Black	20.0	Single	20.2 - 20.4	30.3	9.0	0.5 - 4.0	41.5	24	24	6.0 - 12.0	6.0 - 12.0	-
7035	L.Grey	25.0	Double	25.2 - 25.4	36.3	9.0	0.5 - 4.0	43.5	29	29	8.0 - 17.0	11.0 - 17.0	8.0-11.0
7001	Grey	25.0	Double	25.2 - 25.4	36.3	9.0	0.5 - 4.0	43.5	29	29	8.0 - 17.0	11.0 - 17.0	8.0-11.0
9005	Black	25.0	Double	25.2 - 25.4	36.3	9.0	0.5 - 4.0	43.5	29	29	8.0 - 17.0	11.0 - 17.0	8.0-11.0
7035	L.Grey	25.0	Single	25.2 - 25.4	36.3	9.0	0.5 - 4.0	43.5	29	29	11.0 - 17.0	11.0 - 17.0	-
7001	Grey	25.0	Single	25.2 - 25.4	36.3	9.0	0.5 - 4.0	43.5	29	29	11.0 - 17.0	11.0 - 17.0	-
9005	Black	25.0	Single	25.2 - 25.4	36.3	9.0	0.5 - 4.0	43.5	29	29	11.0 - 17.0	11.0 - 17.0	-
7035	L.Grey	32.0	Double	32.2 - 32.4	43.2	9.0	0.5 - 4.0	49.5	36	36	11.0 - 21.0	15.0 - 21.0	11.0 - 15.0
7001	Grey	32.0	Double	32.2 - 32.4	43.2	9.0	0.5 - 4.0	49.5	36	36	11.0 - 21.0	15.0 - 21.0	11.0 - 15.0
9005	Black	32.0	Double	32.2 - 32.4	43.2	9.0	0.5 - 4.0	49.5	36	36	11.0 - 21.0	15.0 - 21.0	11.0 - 15.0
7035	L.Grey	32.0	Single	32.2 - 32.4	43.2	9.0	0.5 - 4.0	49.5	36	36	15.0 - 21.0	15.0 - 21.0	-
7001	Grey	32.0	Single	32.2 - 32.4	43.2	9.0	0.5 - 4.0	49.5	36	36	15.0 - 21.0	15.0 - 21.0	-
9005	Black	32.0	Single	32.2 - 32.4	43.2	9.0	0.5 - 4.0	49.5	36	36	15.0 - 21.0	15.0 - 21.0	-
7035	L.Grey	40.0	Double	40.2 - 40.4	55.2	13.2	0.5 - 4.0	56.0	46	46	16.0 - 28.0	19.0 - 28.0	16.0 - 19.0
7001	Grey	40.0	Double	40.2 - 40.4	55.2	13.2	0.5 - 4.0	56.0	46	46	16.0 - 28.0	19.0 - 28.0	16.0 - 19.0
9005	Black	40.0	Double	40.2 - 40.4	55.2	13.2	0.5 - 4.0	56.0	46	46	16.0 - 28.0	19.0 - 28.0	16.0 - 19.0
7035	L.Grey	40.0	Single	40.2 - 40.4	55.2	13.2	0.5 - 4.0	56.0	46	46	19.0 - 28.0	19.0 - 28.0	-
7001	Grey	40.0	Single	40.2 - 40.4	55.2	13.2	0.5 - 4.0	56.0	46	46	19.0 - 28.0	19.0 - 28.0	-
9005	Black	40.0	Single	40.2 - 40.4	55.2	13.2	0.5 - 4.0	56.0	46	46	19.0 - 28.0	19.0 - 28.0	-

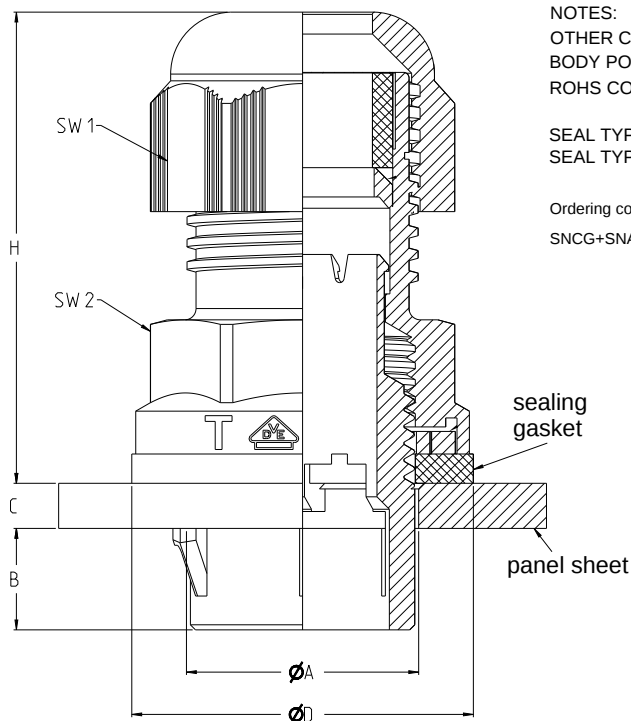


NOTES:

OTHER CABLE ϕ IS AVAILABLE UPON SPECIAL ORDER.
BODY POLYAMIDE 6/6, SEALING WASHER, EPDM, BLACK
ROHS COMPLIANCE


SEAL TYPE SINGLE MEANS "S1" CLAMPING RANGE
SEAL TYPE DOUBLE MEANS "S1+S2" CLAMPING RANGE

Ordering code examples:

SNCG+SNAP SIZE CODE+SEAL TYPE+COLOR CODE

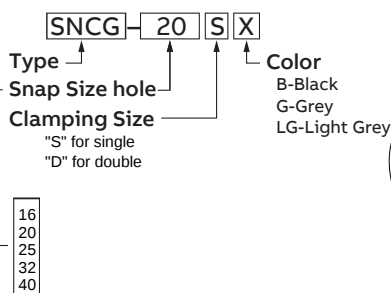

application diagram

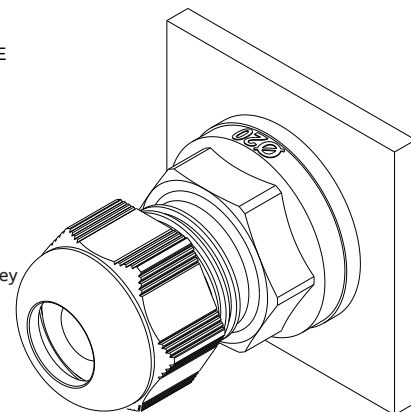

SEE NEXT PAGES

SNAP IN CABLE GLAND PRO

www.sinohua.cn

SINOHUA

