
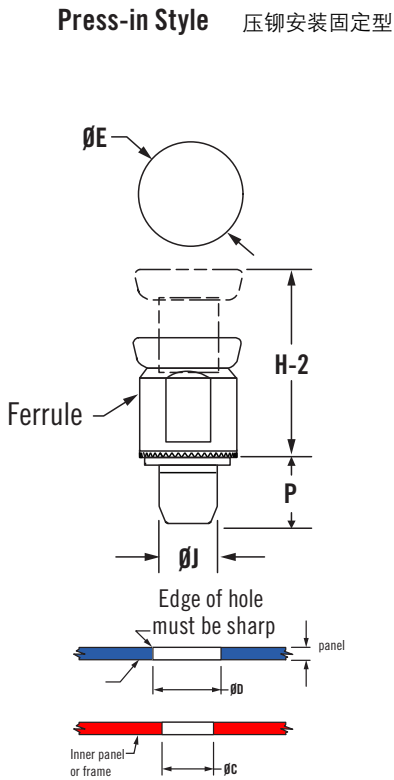
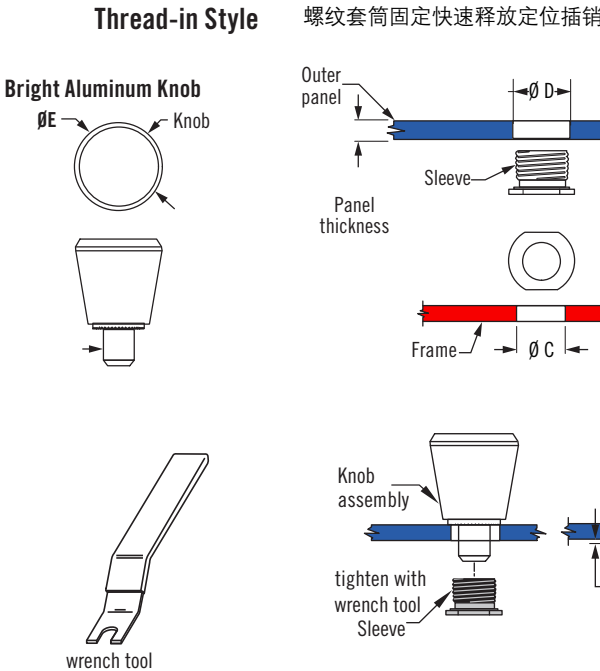



THIS DOCUMENT IS THE PROPERTY OF SINOHUA ENGINEERING SOLUTIONS.THE CONTENTS ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SINOHUA ENGINEERING SOLUTIONS.
NEITHER THIS DOCUMENT NOR ITS CONTENT SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON,COPIED OR PUBLISHED WITHOUT SINOHUA ENGINEERING SOLUTIONS'PRIOR WRITTEN CONSENT.

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/20	SFH

Retractable,Quick release and Quick lock Fastener

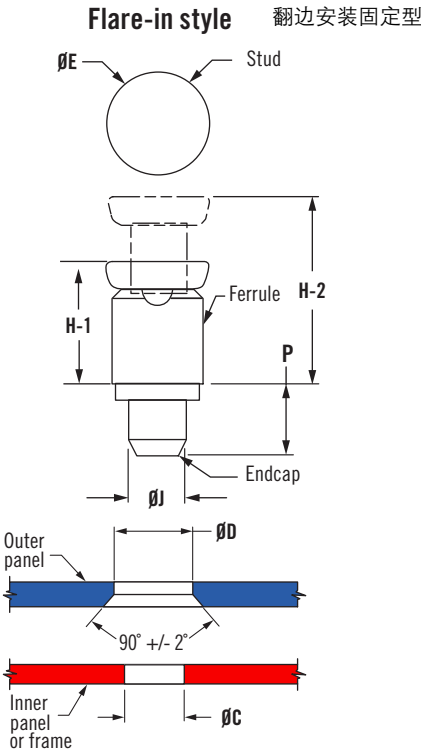


Material:
knob and ferrule:
steel zinc plated,chromate plus sealer;
spring:stainless steel;
stainless steel knob is available upon request

SEE NEXT PAGE FOR DIMENSIONAL DETAILS



ALL DIMENSIONS IN mm
GENERAL TOLERANCES ±0.25
UNLESS OTHERWISE STATED
1 DECIMAL PLACE ±0.25
2 DECIMAL PLACES ± 0.10
ANGULAR ±1°



DESCRIPTION:
**Retractable
Spring Plunger**

MATERIAL: SEE TABLE		COLOUR: SEE TABLE		PART No: SEE TABLE	
DRG No: MCM-19212		PROJECT NUMBER: US19-0039		Mass:(g)	SHEET SIZE A4
DRN SFH	DATE 03/02/19	CHKD TC	DATE 03/02/19	SCALE NTS	SHEET No. 1 OF 2

REV.	MODIFICATION.	DATE	DRN
01	PRODUCTION RELEASE	02/02/20	SFH

Retractable,Quick release and Quick lock Fastener

螺纹套筒固定快速释放定位插销

物料编号	结构	适合面板厚度	建议面板孔径D	建议底层板孔径C	尾部长度P	插销外径 J	手柄凸出高度 H1	手柄完全提升后高度H2	手柄外径 E
Part #	reset feature option	panel thickness	panel hole	base plate hole	length P	pin diameter	knob reset height	max knob height	knob diameter
SQRP1	带制动机制 hold open	0.6-1.5mm	7.14	4.8	6.4	4.7	13.4	18.4	13.5
SQRP2	不带制动机制 auto reset	0.6-1.5mm	7.14	4.8	6.4	4.7	13.4	18.4	13.5
SQRP3	带制动机制 hold open	0.8-3.2mm	9.12	6.4	7.9	6.2	18.3	24.6	17.6
SQRP4	不带制动机制 auto reset	0.8-3.2mm	9.12	6.4	7.9	6.2	18.3	24.6	17.6
SQRP5	不带制动机制 auto reset	0.8-1.5mm	7.14	4.3	4.4	4.2	9.2	12.9	8.6
SQRP6	不带制动机制 auto reset	0.8-3.2mm	9.12	6.4	6.9	6.3	12.2	20.4	11.5

压铆安装固定型


物料编号	结构	适合面板厚度	建议面板孔径D	建议底层板孔径C	尾部长度P	插销外径 J	手柄凸出高度 H1	手柄完全提升后高度H2	手柄外径 E
CQRP1	带制动机制 hold open	0.8-1.5mm	6.7	4.3	4.4	4.2	9.2	12.9	8.6
CQRP2	不带制动机制 auto reset	0.8-1.5mm	6.7	4.3	4.4	4.2	9.2	12.9	8.6
CQRP3	带制动机制 hold open	1.5-3.8mm	8.4	6.4	8.2	6.3	12.2	19.3	11.5
CQRP4	不带制动机制 auto reset	1.5-3.8mm	8.4	6.4	8.2	6.3	12.2	19.3	11.5

翻边安装固定型

物料编号	结构	适合面板厚度	建议面板孔径D	建议底层板孔径C	尾部长度P	插销外径 J	手柄凸出高度 H1	手柄完全提升后高度H2	手柄外径 E
FQRP1	带制动机制 hold open	0.8-1.5mm	6.8	4.3	4.4	4.2	9.9	13.6	8.6
FQRP2	不带制动机制 auto reset	0.8-1.5mm	6.8	4.3	4.4	4.2	9.9	13.6	8.6
FQRP3	带制动机制 hold open	1.5-2.3mm	6.8	4.3	5.2	4.2	9.1	12.8	8.6
FQRP4	不带制动机制 auto reset	1.5-2.3mm	6.8	4.3	5.2	4.2	9.1	12.8	8.6
FQRP5	带制动机制 hold open	1.5-3.2mm	9.2	6.4	7.9	6.3	13.7	19.8	11.5
FQRP6	不带制动机制 auto reset	1.5-3.2mm	9.2	6.4	7.9	6.3	13.7	19.8	11.5
FQRP7	带制动机制 hold open	3.2-4.7mm	9.2	6.4	9.4	6.3	12.2	18.2	11.5
FQRP8	不带制动机制 auto reset	3.2-4.7mm	9.2	6.4	9.4	6.3	12.2	18.2	11.5



ALL DIMENSIONS IN mm
GENERAL TOLERANCES ± 0.25
UNLESS OTHERWISE STATED
1 DECIMAL PLACE ± 0.25
2 DECIMAL PLACES ± 0.10
ANGULAR $\pm 1^{\circ}$



DESCRIPTION:

Retractable
Spring Plunger

MATERIAL:
SEE TABLE

DRG No:
MCM-19212

DRN
SFH

DATE
03/02/19

COLOUR:
SEE TABLE

PROJECT NUMBER:
US19-0039

CHKD
TC

DATE
03/02/19

PART No:
SEE TABLE

Mass:(g)
SHEET SIZE
A4

SCALE
NTS

SHEET No.
2 OF 2