


Venting Elements/Breather Plugs




Venting Elements/Breather Plugs

Range: Cable Glands/Grommets

DESCRIPTION


- Typical air flow 90 - 130 ml/min/cm²; at $\Delta p = 0,01$ bar
- Water entry pressure > 1 bar
- Temperature range -40°C/+100°C
- Protection grade IP66 / IP67 / IP69K



Brass Air Vent Plugs


The brass air vent plug is design for venting air and preventing water intake, can be used to relieve pressure or vacuum on bearing housings, gear boxes, reservoirs, or any application where venting is necessary.

plugs protection level can reach IP68, offer various levels of air flow and help to equalize temperature and pressure and prevent internal condensation. Welcome to contact us for a quote or samples.

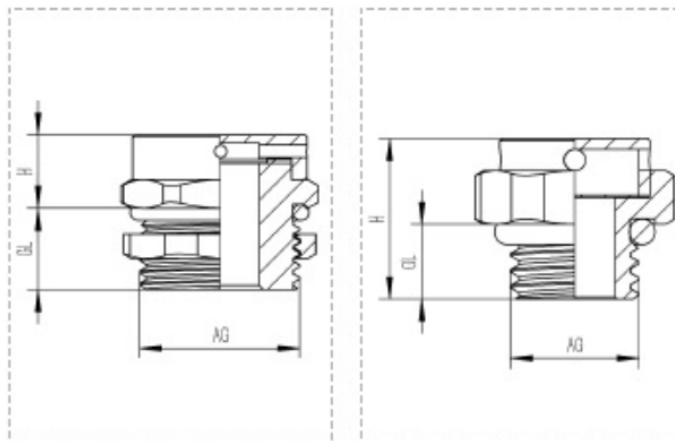

规格 Item	透气量 Breathability	螺纹长度 GL Thread Length	接合长度 H Joint Length	螺纹直径 AG Thread O.D.	扳手径 Spanner size	产品编号 Code
M5×0.8	≥ 300ml/mim/@70mbar	7	15	5	10	BF.M5 SS
M6×1.0	≥ 300ml/mim/@70mbar	7	15	6	10	BF.M6 SS
M8×1.0	≥ 900ml/mim/@70mbar	7	16	8	14	BF.M8 SS
M8×1.25	≥ 1500ml/mim/@70mbar	7	16	8	14	BF.M8x1.25 SS
M10×1.0	≥ 1500ml/mim/@70mbar	8	16	10	17	BF.M10 SS
M10×1.5	≥ 1500ml/mim/@70mbar	8	16	10	17	BF.M10x1.5 SS
M12×1.5	≥ 1500ml/mim/@70mbar	6	14	12	17	BF.M12 L6 SS
M12×1.5	≥ 1500ml/mim/@70mbar	7	15	12	17	BF.M12 L7 SS
M12×1.5	≥ 1500ml/mim/@70mbar	10	18	12	17	BF.M12 L10 SS
M12×1.75	≥ 4000ml/mim/@70mbar	7	15	12	17	BF.M12x1.75 SS
M16×1.5	≥ 2300ml/mim/@70mbar	10	19.5	16	22	BF.M16 SS
M20×1.5	≥ 2300ml/mim/@70mbar	10	19.5	20	22	BF.M20 SS
M25×1.5	≥ 2500ml/mim/@70mbar	10	21	25	30	BF.M25 SS
G1/8	≥ 1500ml/mim/@70mbar	8	16	18.5	17	BF.G1/8 SS
G1/4	≥ 1500ml/mim/@70mbar	7	15	18.5	17	BF.G1/4 SS
G3/8	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.G3/8 SS
G1/2	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.G1/2 SS
NPT1/8	≥ 1500ml/mim/@70mbar	8	16	18.5	17	BF.NPT1/8 SS
NPT1/4	≥ 1500ml/mim/@70mbar	7	15	18.5	17	BF.NPT1/4 SS
NPT3/8	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.NPT3/8 SS
NPT1/2	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.NPT1/2 SS

其他样式可支持来电咨询
Other styles support call consultation



Stainless Air Vent Plugs

规格 Item	透气量 Breathability	螺纹长度 GL Thread Length	接合长度 H Joint Length	螺纹直径 AG Thread O.D.	扳手径 Spanner size	产品编号 Code
M5×0.8	≥ 300ml/mim/@70mbar	7	15	5	10	BF.M5 SS
M6×1.0	≥ 300ml/mim/@70mbar	7	15	6	10	BF.M6 SS
M8×1.0	≥ 900ml/mim/@70mbar	7	16	8	14	BF.M8 SS
M8×1.25	≥ 1500ml/mim/@70mbar	7	16	8	14	BF.M8x1.25 SS
M10×1.0	≥ 1500ml/mim/@70mbar	8	16	10	17	BF.M10 SS
M10×1.5	≥ 1500ml/mim/@70mbar	8	16	10	17	BF.M10x1.5 SS
M12×1.5	≥ 1500ml/mim/@70mbar	6	14	12	17	BF.M12 L6 SS
M12×1.5	≥ 1500ml/mim/@70mbar	7	15	12	17	BF.M12 L7 SS
M12×1.5	≥ 1500ml/mim/@70mbar	10	18	12	17	BF.M12 L10 SS
M12×1.75	≥ 4000ml/mim/@70mbar	7	15	12	17	BF.M12x1.75 SS
M16×1.5	≥ 2300ml/mim/@70mbar	10	19.5	16	22	BF.M16 SS
M20×1.5	≥ 2300ml/mim/@70mbar	10	19.5	20	22	BF.M20 SS
M25×1.5	≥ 2500ml/mim/@70mbar	10	21	25	30	BF.M25 SS
G1/8	≥ 1500ml/mim/@70mbar	8	16	18.5	17	BF.G1/8 SS
G1/4	≥ 1500ml/mim/@70mbar	7	15	18.5	17	BF.G1/4 SS
G3/8	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.G3/8 SS
G1/2	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.G1/2 SS
NPT1/8	≥ 1500ml/mim/@70mbar	8	16	18.5	17	BF.NPT1/8 SS
NPT1/4	≥ 1500ml/mim/@70mbar	7	15	18.5	17	BF.NPT1/4 SS
NPT3/8	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.NPT3/8 SS
NPT1/2	≥ 2300ml/mim/@70mbar	10	19.5	24	22	BF.NPT1/2 SS
其他样式可支持来电咨询 Other styles support call consultation						



Subject to technical modification without notice.
Typographical and other errors do not justify claim for damages.



MECHANICAL EQUIPMENT



LIGHTING EQUIPMENT



NEW ENERGY VEHICLE



PHOTOVOLTAIC (PV)



OUTDOOR ADVERTISEMENTS



WHEEL TRANSPORT DOCK

